
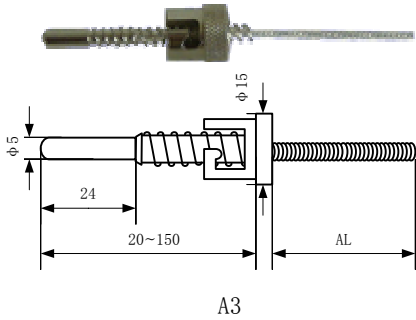
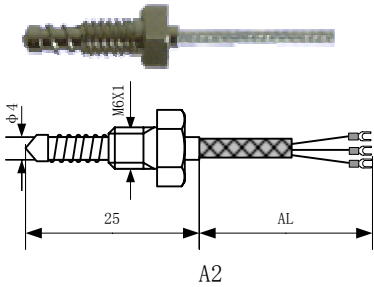


Style STT-A

The STT-A series platinum resistance temperature sensor widely applies in plastic machinery, mold, bearing temperature detection.

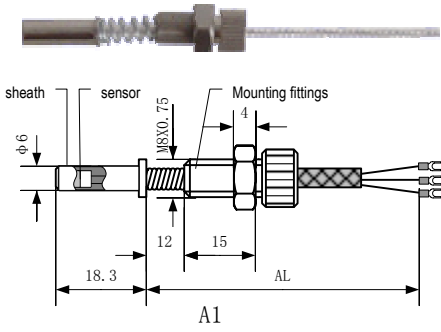

STT-A A E/F/G/H L P T W S

A Style Code

- 1=A1
- 2=A2
- 3=A3

A Element

- 1=Pt100 5=Pt500 10=Pt1000

E/F/G/H Leadwire Construction (wire/type/Insulation Jacket/Shield)

E Wire	F Type	G Insulation Jacket	H Shield
2=2-wire	1=TPU	1=Needed	1=Needed
3=3-wire	2=Teflon	0=None	0=None
4=4-wire	3=Silicone		
	4=PVC		
	☞ Custom		

L Leadwire Length AL (mm)

- 1=1000 2=2000 3=3000 ☞ Custom

P Accuracy

- A=Class A B=Class B 1/3B=Class 1/3B

T Temperature Range (°C)

- 1=-200~100 2=-50~100 3=-50~200 4=-50~250 ☞ Custom

W Leadwire Termination

- 0=None 1=M4 lugs 2=Tin-Coated ☞ Custom

S Special Requirements

- 0=None ☞ Custom

Note: 1. The **Custom** option should be filled the requirements directly.

2. If there are over **one** requirements in this **S** option please use the “/” fill it in seriate

For Example STT-A1---A1---E3 F2 G1 H1---L2---PA---T0~300---W1---S0
 Style Code Pt100 3-wire Teflon F4 Jacket Shield AL=2000mm Class A 0~300°C M4 Lugs None