


# STTT-H series thermocouple

STTT-H series thermocouple is manufactured with mineral insulated (MI) sheath and used to measure temperature for water, gas, heat ventilation and etc.

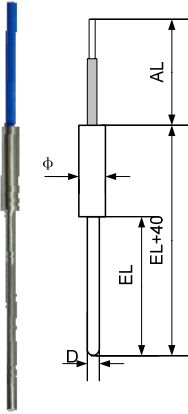

	STTT-H	A	B	C	D	F	L	P	T	W	S
H Style Code	_____										
A Calibration	_____										
K=Type K E=Type E J=Type J T=Type T											
B Sheath O.D.(mm)	_____										
1=1.0 1.6=1.6 2=2.0 3=3.0 4=4.0											
5=5.0 6=6.0 8=8.0 ☞Customized											
C EL Dimension (mm)	_____										
30=30 40=40 100=100 200=200 ☞ Customized											
D Sheath Materia	_____										
1=sus304 6=sus316 ☞ Customized											
F Lead Wire Type	_____										
1=PVC 2=Teflon 3=Stainless steel overbraid											
L Lead Wire Length AL (mm)	_____										
1=1000 2=2000 3=3000 ☞Customized											
P Accuracy	_____										
I =Class I II=Class II											
T Temperature Range (°C)	_____										
5=-200~200 6=0~200 7=0~400 ☞Customized											
W Lead Termination	_____										
0=None 1=M4 lugs ☞ Customized											
S Special Requirements	_____										
0=None 1=Spring strain relief 5=Exposed junction											
6=Grounded junction ☞ Customized											

Note: 1. The 'Customized' option should be filled your requirements directly  
 2. 'Special Requirements' if there are any more options, please use the '/' fill it in seriate.  
 3. Standard products for supply are Ungrounded junction type.

Order example: STTT-T---A-E---B4---C150---D6---F3---L2---P I ---T6---W0---S0  
Style Code Type E O.D.=4mm TL=150mm sus316 Teflon 2000mm Class I 0~200°C None None